
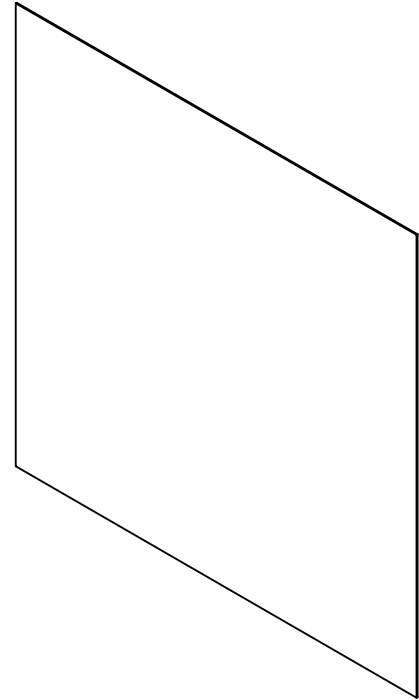
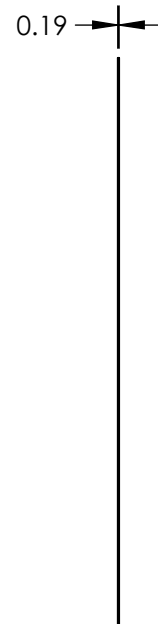


NOTES:


1. SUBSTRATE: Aluminum Wires on COP
2. EXTINCTION RATIO: >1415:1 (@ 0° AOI, 550nm)
3. TRANSMISSION (%): 84.9 (Typical @ 550nm)
4. WAVELENGTH RANGE: 400 - 1200 nm
5. ORIENTATION OF AXIS: 0° ± 1.5°  
NOTCHES ON POLARIZING FILM DEPICT DIRECTION OF POLARIZATION DIRECTION
6. RoHS3 COMPLIANT

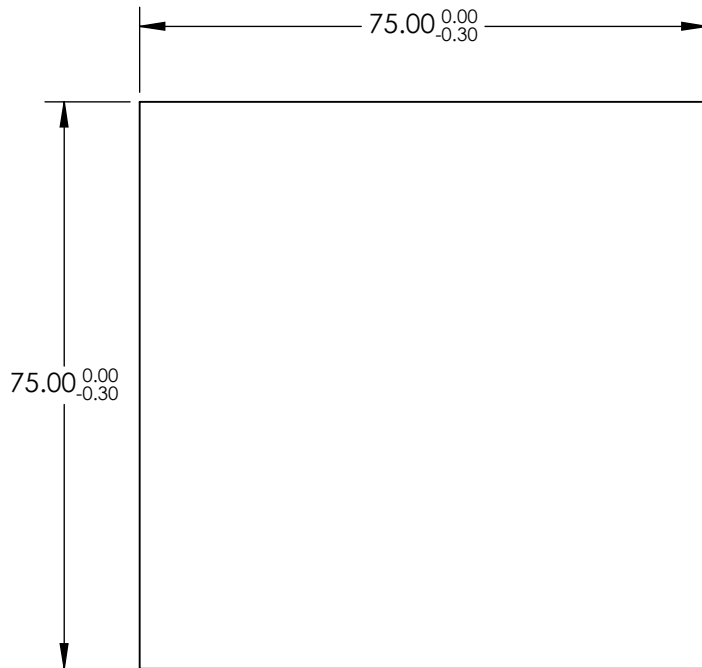

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

**EO**® Edmund Optics®

THIRD ANGLE PROJECTION 		TITLE	75 x 75 mm Stabilized Wire Grid Polarizing Film	
ALL DIMS IN	mm	DWG NO	20238	SHEET 6 OF 6