NOTES:

SUBSTRATE

Sapphire (Al2O3) Axis Orientation: Random


2. COATING (APPLY ACROSS CLEAR APERTURE) \$1 & \$2: NONE

3. SURFACE S2 TO BE PARALLEL TO SURFACE S1 TO WITHIN ≤3.5 ARCMIN



FINE GRIND SURFACE

Rohs Compliant

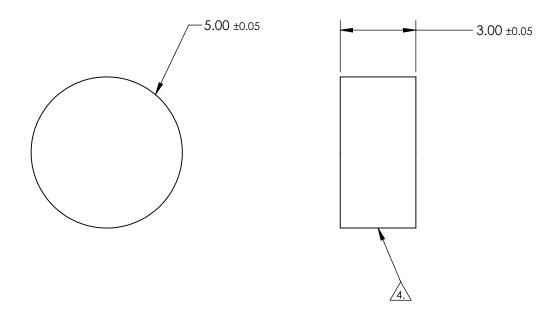

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

SHAPE	\$1 PLANO	S2 PLANO		B	Edmund Optics	®
SURFACE QUALITY	80 - 50	80 - 50			5mm Dia., 3mm Thick, Uncoated Sapphire	· <u> </u>
SURFACE FLATNESS	2λ (typical)	2λ (typical)	THIRD ANGLE PROJECTION	TITLE	Window	C
CLEAR APERTURE	Ø 4.50	Ø4.50				IEEE
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN mm	DWG NO		HEET OF 1